

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification: A61M 15/00		(11) International Publication Number: WO 94/05339
(52) International Filing Date: 7 September 1993 (07.09.93)		(43) International Publication Date: 17 March 1994 (17.03.94)
(53) Priority Date: 8 September 1992 (08.09.92) GB 921937.2		(74) Agent: BEN-NATHAN, Laurence, Albert; Urquhart-Dykes & Lord, 91 Wimpole Street, London W1M 8AH (GB).
(71) Applicant (for all designated States except US): NORTON HEALTHCARE LIMITED (GB/GB); Central House, Fins Meadows, Hadow, Essex CM19 3TS (GB).		(54) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CL, DE, DK, EA, FI, FR, GB, HU, JP, KP, KR, KZ, LI, LU, LV, MD, MG, MW, NL, NO, NZ, PL, PT, RU, SD, SE, SK, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LI, MC, NL, PT, SE, SI, JP) patent (BF, BI, CF, CG, CI, CM, GA, GN, ML, MR, NE, NG, SN, TD, TG).
(72) Inventor(s): and (73) Invention/Applicant (for US only): ANGEL, Clive, Graham (GB/GB); 9 Hildon, Midhurst, Roydon, Hertfordshire SG1 6ST (GB). HARRIS, Mark, Alexander (GB/GB); 5 Moss Lane, Midhurst, Roydon, Hertfordshire SG1 4EH (GB). TRENDMAN, William, Richard (GB/GB); 1 Colles Lane, Outington, Cambridge, Cambridgeshire CB4 5BA (GB).		(57) Abstract: A medicament dispensing device comprising an inhalation nozzle (46), a reservoir (16) for containing a supply of medicament in powder form, a dispensing slide (44) for receiving a dose of powder from the reservoir and for pressing the dose for inhalation through the nozzle (46), and a movable cover (13) for the nozzle, a dose of powder being first loaded into a cavity (47) in the slide (44) with the slide (44) then being moved to present a dose of medicament for inhalation, in response to opening of the cover.

Published  
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

## (54) Title: MEDICAMENT DISPENSING DEVICE

## (57) Abstract

A medicament dispensing device comprising an inhalation nozzle (46), a reservoir (16) for containing a supply of medicament in powder form, a dispensing slide (44) for receiving a dose of powder from the reservoir and for pressing the dose for inhalation through the nozzle (46), and a movable cover (13) for the nozzle, a dose of powder being first loaded into a cavity (47) in the slide (44) with the slide (44) then being moved to present a dose of medicament for inhalation, in response to opening of the cover.

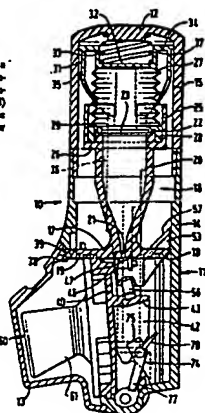

## FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front page of pamphlets publishing international applications under the PCT.

AF	Algeria	FR	France	NO	Norway
AG	Argentina	GA	Ghana	NP	Nepal
AI	Angola	GB	United Kingdom	OM	Oman
AL	Albania	GD	Grenada	PA	Panama
AM	Armenia	GE	Georgia	PE	Peru
AN	Antigua and Barbuda	GR	Greece	PG	Papua New Guinea
AO	Angola	HR	Croatia	PH	Philippines
AR	Argentina	HU	Hungary	PK	Pakistan
AS	Armenia	IE	Ireland	PL	Poland
AT	Austria	IL	Israel	PT	Portugal
AU	Australia	IN	India	RO	Romania
AW	Aruba	IQ	Iraq	RS	Serbia
AX	Åland Islands	IS	Iceland	RU	Russian Federation
AY	Åland Islands	IT	Italy	SA	Saudi Arabia
BA	Bosnia and Herzegovina	JP	Japan	SC	Seychelles
BB	Barbados	KR	Republic of Korea	SD	Sudan
BC	Belize	KU	Kuwait	SE	Sweden
BD	Bangladesh	KG	Kyrgyzstan	SG	Singapore
BE	Belgium	LA	Laos	SI	Slovenia
BF	Burkina Faso	LB	Lebanon	SK	Slovakia
BG	Bulgaria	LC	St. Lucia	SL	Sierra Leone
BH	Bahrain	LI	Liechtenstein	SN	Senegal
BI	Burundi	LK	Sri Lanka	SO	Somalia
BJ	Benin	LR	Liberia	SR	Suriname
BK	Bhutan	LS	Lesotho	SS	South Sudan
BL	Bolivia	LT	Lithuania	ST	San Tomé and Príncipe
BM	Bermuda	LU	Luxembourg	SV	El Salvador
BN	Brunei Darussalam	LV	Latvia	TD	Chad
BO	Bolivia	LY	Libya	TE	Togo
BR	Brazil	MA	Malaysia	TH	Thailand
BS	Bahamas	MD	Moldova	TJ	Tajikistan
BT	Bhutan	ME	Montenegro	TM	Turkmenistan
BV	Bouvet Island	MG	Madagascar	TR	Turkey
BW	Botswana	MH	Marshall Islands	TT	Trinidad and Tobago
BY	Belarus	MI	Maldives	TV	Tuvalu
BZ	Belize	MM	Myanmar	UG	Uganda
		MO	Macao	US	United States of America
		MP	Marshall Islands	UY	Uruguay
		MS	Montserrat		
		MT	Malta		
		MU	Mauritius		
		MV	Maldives		
		MW	Malawi		
		MX	Mexico		
		MY	Malaysia		
		MZ	Mozambique		
		NA	Namibia		
		NC	New Caledonia		
		NE	Niger		
		NG	Nigeria		
		NI	Nicaragua		
		NL	Netherlands		
		NM	Northern Mariana Islands		
		NN	Norway		
		NP	Nepal		
		NQ	Norway		
		NR	Nauru		
		NU	Niue		
		NV	Norway		
		NW	Norway		
		NY	Norway		
		NZ	New Zealand		
		OA	Oman		
		OB	Oman		
		OC	Oman		
		OD	Oman		
		OE	Oman		
		OF	Oman		
		OG	Oman		
		OH	Oman		
		OI	Oman		
		OJ	Oman		
		OK	Oman		
		OL	Oman		
		OM	Oman		
		ON	Oman		
		OO	Oman		
		OP	Oman		
		OQ	Oman		
		OR	Oman		
		OS	Oman		
		OT	Oman		
		OU	Oman		
		OV	Oman		
		OW	Oman		
		OX	Oman		
		OY	Oman		
		OZ	Oman		
		PA	Panama		
		PB	Panama		
		PC	Panama		
		PD	Panama		
		PE	Peru		
		PF	French Polynesia		
		PG	Papua New Guinea		
		PH	Philippines		
		PI	Pakistan		
		PJ	Pakistan		
		PK	Pakistan		
		PL	Poland		
		PM	St. Pierre and Miquelon		
		PN	Poland		
		PO	Poland		
		PP	Poland		
		PQ	Poland		
		PR	Poland		
		PS	Poland		
		PT	Portugal		
		PU	Portugal		
		PV	Portugal		
		PW	Portugal		
		PX	Portugal		
		PY	Portugal		
		PZ	Portugal		
		QA	Qatar		
		QB	Qatar		
		QC	Qatar		
		QD	Qatar		
		QE	Qatar		
		QF	Qatar		
		QG	Qatar		
		QH	Qatar		
		QI	Qatar		
		QJ	Qatar		
		QK	Qatar		
		QL	Qatar		
		QM	Qatar		
		QN	Qatar		
		QO	Qatar		
		QP	Qatar		
		QQ	Qatar		
		QR	Qatar		
		QS	Qatar		
		QT	Qatar		
		QU	Qatar		
		QV	Qatar		
		QW	Qatar		
		QX	Qatar		
		QY	Qatar		
		QZ	Qatar		
		RA	Romania		
		RB	Romania		
		RC	Romania		
		RD	Romania		
		RE	Romania		
		RF	Romania		
		RG	Romania		
		RH	Romania		
		RI	Romania		
		RJ	Romania		
		RK	Romania		
		RL	Romania		
		RM	Romania		
		RN	Romania		
		RO	Romania		
		RP	Romania		
		RQ	Romania		
		RR	Romania		
		RS	Romania		
		RT	Romania		
		RU	Russian Federation		
		RV	Russian Federation		
		RW	Rwanda		
		RY	Rwanda		
		RZ	Rwanda		
		SA	Saudi Arabia		
		SB	St. Helena		
		SC	Seychelles		
		SD	Sudan		
		SE	Sweden		
		SF	Sweden		
		SG	Singapore		
		SH	St. Helena		
		SI	Slovenia		
		SJ	St. John		
		SK	Slovakia		
		SL	Sierra Leone		
		SM	San Marino		
		SN	Senegal		
		SO	Somalia		
		SP	St. Pierre and Miquelon		
		SQ	Slovenia		
		SR	Suriname		
		SS	South Sudan		
		ST	St. Tomé and Príncipe		
		SV	El Salvador		
		SW	Switzerland		
		SX	Switzerland		
		SY	Switzerland		
		SZ	Switzerland		
		TA	Taiwan		
		TB	Taiwan		
		TC	Taiwan		
		TD	Chad		
		TE	Togo		
		TF	Taiwan		
		TG	Togo		
		TH	Thailand		
		TI	Taiwan		
		TJ	Tajikistan		
		TK	Taiwan		
		TL	Timor-Leste		
		TM	Turkmenistan		
		TN	Tunisia		
		TO	Tonga		
		TP	Taiwan		
		TQ	Taiwan		
		TR	Turkey		
		TS	Taiwan		
		TT	Trinidad and Tobago		
		TU	Taiwan		
		TV	Tuvalu		
		TW	Taiwan		
		TX	Taiwan		
		TY	Taiwan		
		TZ	Tanzania		
		UA	Ukraine		
		UB	Ukraine		
		UC	Ukraine		
		UD	Ukraine		
		UE	Ukraine		
		UF	Ukraine		
		UG	Uganda		
		UH	Ukraine		
		UI	Ukraine		
		UJ	Ukraine		
		UK	United Kingdom		
		UL	Ukraine		
		UM	Ukraine		
		UN	Ukraine		
		UO	Ukraine		
		UP	Ukraine		
		UQ	Ukraine		
		UR	Ukraine		
		US	United States of America		
		UT	Ukraine		
		UU	Ukraine		
		UV	Ukraine		
		UW	Ukraine		
		UX	Ukraine		
		UY	Uruguay		
		UZ	Uzbekistan		
		VA	Vatican		
		VB	Vatican		
		VC	St. Vincent and the Grenadines		
		VD	Vatican		
		VE	Venezuela		
		VF	Vatican		
		VG	Vatican		
		VH	Vatican		
		VI	Virgin Islands		
		VJ	Vatican		
		VK	Vatican		
		VL	Vatican		
		VM	Vatican		
		VN	Vietnam		
		VO	Vatican		
		VP	Vatican		
		VQ	Vatican		
		VR	Vatican		
		VS	Vatican		
		VT	Vatican		
		VU	Vatican		
		VW	Vatican		
		VX	Vatican		
		VY	Vatican		
		VZ	Vatican		
		WA	Western Sahara		
		WB	Western Sahara		
		WC	Western Sahara		
		WD	Western Sahara		
		WE	Western Sahara		
		WF	Western Sahara		
		WG	Western Sahara		
		WH	Western Sahara		
		WI	Western Sahara		
		WJ	Western Sahara		
		WK	Western Sahara		
		WL	Western Sahara		
		WM	Western Sahara		
		WN	Western Sahara		
		WO	Western Sahara		
		WP	Western Sahara		
		WQ	Western Sahara		
		WR	Western Sahara		
		WS	Western Sahara		
		WT	Western Sahara		
		WU	Western Sahara		
		WV	Western Sahara		
		WX	Western Sahara		
		WY	Western Sahara		
		WZ	Western Sahara		
		XA	Xenia		
		XB	Xenia		
		XC	Xenia		
		XD	Xenia		
		XE	Xenia		
		XF	Xenia		
		XG	Xenia		
		XH	Xenia		
		XI	Xenia		
		XJ	Xenia		
		XK	Xenia		
		XL	Xenia		
		XM	Xenia		
		XN	Xenia		
		XO	Xenia		
		XP	Xenia		
		XQ	Xenia		
		XR	Xenia		
		XS	Xenia		
		XT	Xenia		
		XU	Xenia		
		XV	Xenia		
		XW	Xenia		
		XX	Xenia		
		XY	Xenia		
		XZ	Xenia		
		YA	Yemen		
		YB	Yemen		
		YC	Yemen		
		YD	Yemen		
		YE	Yemen		
		YF	Yemen		
		YG	Yemen		
		YH	Yemen		
		YI	Yemen		
		YJ	Yemen		
		YK	Yemen		
		YL	Yemen		
		YM	Yemen		
		YN	Yemen		
		YO	Yemen		
		YP	Yemen		
		YQ	Yemen		
		YR	Yemen		
		YS	Yemen		
		YT	Yemen		
		YU	Yemen		
		YV	Yemen		
		YW	Yemen		
		YX	Yemen		
		YY	Yemen		
		YZ	Yemen		
		ZA	Zambia		
		ZB	Zambia		
		ZC	Zambia		
		ZD	Zambia		
		ZE	Zambia		
		ZF	Zambia		
		ZG	Zambia		
		ZH	Zambia		
		ZI	Zambia		
		ZJ	Zambia		
		ZK	Zambia		
		ZL	Zambia		
		ZM	Zambia		
		ZN	Zambia		
		ZO	Zambia		
		ZP	Zambia		
		ZQ	Zambia		
		ZR	Zambia		
		ZS	Zambia		
		ZT	Zambia		

removed, the dosing plunger is moved by its spring loading to bring the dose into communication with a whirl mixing chamber through which inhaled air passes.

However a powder dose is loaded into and remains in the dose receiving recess in the plunger from the time the cover is replaced until the next use of the inhaler. Since powder blends are generally hygroscopic, any moisture in the dose receiving recess tends to make the powder dose adhere to the surfaces of the recess. This tends to prevent a full dose from being delivered during the next inhalation. This is aggravated if the patient exhales into the device thereby coating the plunger recess with moisture. Since a dose of powder is reloaded into the recess immediately it is depressed into the powder reservoir on replacing the cover, there is no opportunity to use a desiccant to absorb any moisture in the dose receiving recess before it receives a powder dose.

Another disadvantage of this device is that the cover is not retained on the inhaler. If the cover is lost the inhaler becomes inoperative which could have severe consequences for a patient relying on use of the inhaler.

A further disadvantage is that the powder is loaded by a spring biased plate acting on the powder in the reservoir. This force tends to result in the powder being compacted to different degrees at different parts of the reservoir which can adversely affect the loading thereof into the recess in the plunger.

The object of the invention is to provide improvements in dry powder medicament dispensing devices to facilitate the operation thereof. It is also an object to improve the delivery of drug doses so as to achieve more consistency in the metered doses of the drug.

The invention provides a medicament dispensing device comprising an inhalation nozzle, a reservoir for containing a supply of medicament in powder form, metering means for producing a dose of powder from said reservoir, dispensing means for presenting such dose for inhalation through said nozzle, a movable cover for said nozzle, and actuating means,

responsive to movement of the cover, for causing actuation of said dispensing means, characterised in that said actuating means include means, responsive to movement of the cover, for causing actuation of said metering means, and, in that, said actuating means are adapted to cause actuation of said metering means and subsequent actuation of said dispensing means, in response to movement of the cover.

An advantage of a device according to the invention over WO 92/04928 is that during storage the metering recess is empty thus minimizing the risk of dose adhering to the cup due to hygroscopic action of the drug compound.

According to a feature of the invention, the cover may remain fixed to the device e.g. by hinging means. An advantage of this feature is that it is then not possible to lose the cover, which would render the device inoperative and thus the patient would be without medication.

According to a further feature of the invention, the metering means may be pneumatic. This feature has the advantage that air flow through the porous powder moves the entire bulk reservoir and applies a metering force at the dose cup with little compaction of the bulk. The result is very consistent powder density in the metering cup - leading to a consistent metered dose. In system of WO 92/04928 the spring force acting on the top of the blend in the bulk reservoir provides the metering force remote from the dosing recess. This means that the metering force is dependent on the powder characteristics and depth of powder so that it is unlikely that the dosing will be consistent. It is well known that powder is compressible, typically up to 30% for pharmaceutical powders, and so applying force to the powder bulk will result in varying powder density and thus varying dose size. It is undesirable in a drug delivery system that the delivered dose should increase substantially over the life of the system.

An embodiment of the invention will now be described by way of example and with reference to the accompanying drawings, in which:-

Figure 1 is a vertical section through a dry powder inhaler embodying the invention;

Figure 2 is an exploded view, on a reduced scale, of the inhaler of Figure 1;

Figures 1A and 1B to Figures 8A and 8B are, respectively, side and sectional views of the inhaler illustrating an opening and closing sequence of the mouthpiece cover and the corresponding positions of the dose delivery slide;

Figures 9A and 9B are diagrammatic sectional details of the hopper and mouthpiece assembly of the inhaler illustrating the air flows therethrough;

Figures 10A and 10B are, respectively, a sectional side view and an end view of the mouthpiece assembly;

Figures 11A and 11B are diagrammatic illustrations of cans provided on the mouthpiece cover allowing their cooperation with yoke arms for controlling actuation and resetting of the dose delivery system;

Figure 12 is a diagrammatic representation of a resilient can track portion provided on a yoke assembly of the inhaler;

Figures 13A-13D are respective diagrammatic illustrations of an alternative triggering mechanism shown in different pivotal positions of the mouthpiece cover; and

Figure 14 is a vertical cross-section through an alternative dose slide carrier assembly.

Referring to the drawings, the inhaler (10) comprises a hollow substantially cylindrical body (11) which is closed at its upper end by a cap portion (12) and has a hinged mouthpiece cover (13) which normally closes an aperture in a lower portion of the side wall of the cylindrical body (11). The body (11) comprises a lower case portion (14) on which the mouthpiece cover (13) is hingedly mounted to be captively retained thereon, and an upper case closed portion (15). The upper and lower case portions (14 and 15) of the body (11) have overlapping, interengageable portions which are provided with cooperating screw threads or other joining means, e.g. a snap connection, for facilitating assembly of the inhaler (10).

A hopper unit (16), for containing a supply of a drug in powdered form, is located within the body part (11). The hopper unit (16) has a generally planar base portion (17) provided with a downwardly notched outer periphery at (18) for engagement with an arcuate ledge portion (19) formed around a portion of the inner wall of the lower case part (14). The hopper unit is disposed in the lower case (14) with the upper case (15) separated therefrom. The hopper unit (16) is formed with a reservoir (20) for containing a supply of the powdered drug. The reservoir (20) has an annular wall which converges progressively towards its lower end at which a discharge orifice (21) is defined. The reservoir (20) is formed integrally with the base section (17). The upper end of the wall of the reservoir (20) is formed with an internal notch (22) for seating a circular disc (23) which is air permeable. The upper end of the annular wall of the reservoir (20) is also provided with an encircling cylindrical wall (25) integrally joined to the wall of the reservoir (20) by an annular portion (26).

A bellows (27) comprises a corrugated wall having a closed upper end and having at its lower end an integral sealing ring (28). The sealing ring has an outer annular portion which locates in an annular channel defined between the upper end of the wall of the reservoir (20) and the encircling cylindrical wall (25). The sealing member (28) has an inwardly directed flange portion (29) which is downturned at its inner edge for engaging around the upper end of the wall of the reservoir (20) to locate in the notch (22) in contact with the disc (23) located therein.

To complete the upper assembly of the powder dispensing apparatus, a yoke member (31) is located on and in contact with the top of the bellows (27). The yoke member (31) has an upper portion comprising a disc-like base portion (32) with an integral upstanding cylindrical wall portion (33) which, at its upper end, extends radially outwardly to provide an annular portion (34) and then axially downwardly to provide an encircling cylindrical wall (35) which has an internal

diameter greater than the external diameter of the cylindrical wall (25) of the hopper unit (16). A compression spring (37) is engaged within the cylindrical central recess defined by the base (32) and upstanding wall (33) of the yoke member and is held in compression when the top case part (15) is fully screw threadably engaged with the lower case portion (14). In order to maintain the compression spring in its compressed state while the mouthpiece cover (13) is in its closed position, thereby preventing dispensing of a dose of powdered medicament from the reservoir (20), the yoke member (31) has a pair of downwardly depending elongate limbs (36), the lower ends of which cooperate with cam portions (70,71) formed integrally with the cover (13) as described below.

The hopper unit (16) has a leg portion (40) downwardly depending from the base part (17) at an acute angle with respect thereto. A circular recess (41) is formed in one side of the leg portion (40) in order to receive a mounting section of a mouthpiece and cyclone assembly described below. The hopper unit (16) also includes an integral mounting section comprising a side wall (42) extending generally perpendicular to the leg portion (40) and having a transverse ledge (43) for mounting a movable dose dispensing slide assembly (44) which is described below.

The hopper assembly (16) is also formed with a channel (45) open at either end for the passage of air therethrough. The channel (45) is also downwardly open along the underside of the base plate portion (17) of the hopper unit.

The dose dispensing slide unit (44) comprises a slide member (46) having a dose receiving depression (47) formed in an upper surface thereof and a vent aperture (47a) therethrough. The slide plate is maintained in contact with the underside of the base plate (17) of the hopper unit for sliding movement between a first position in which the dose receiving depression (47) is located beneath the outlet orifice (21) of the drug reservoir (20) and a second position in which the depression (47) containing the dose of drug is placed in a primary air mixing chamber provided by the channel

(45) in the hopper unit base plate (17). In the first position, the vent aperture (47a) communicates with the channel (45). The slide (46) is in the form of a narrow plate with the depression (47) formed in its upper surface. At one end of the slide, a pair of spaced transverse walls (48,49) project upwardly and are received in a slot in the hopper base plate (17). The slide (46) also has a laterally projecting peg (50). The slide (46) is spring biased to its second position in which its depression (47) is placed in the primary mixing chamber (45). For this purpose, a leaf spring (51) is provided, one end of the spring being located in the slot defined between the walls (48,49) of the slide and the other end of the leaf spring being fixed to an outer side wall portion of the reservoir (20).

The slide member (46) is mounted on a slide carrier (53) which has in its upper surface a channel (54) in which the slide member (46) is slidably mounted and in its lower surface a recess (55) for receiving a biasing spring (56). The slide mounting (53) has an upwardly projecting narrow flange (57) which defines with a lower portion of the side wall of the reservoir (20) an inlet air passage to the primary mixing chamber (45).

The spring (56) which extends at an angle to the vertical axis of the device, biases the slide member (46) when located in the upper channel (54) of the slide mounting (53), against the underside of the hopper base plate (17) and also into contact with the side wall of the leg portion (40) of the hopper unit. The contact between the slide member (46) and the base plate (17) and leg portion (40) of the hopper unit is such that pressurized air can bleed therebetween without permitting the passage of the powdered drug therebetween. This is a feature of the method of loading a dose of drug into the dosing depression (47) in the slide plate, which is described below.

A further element of the device is an integral mouthpiece and cyclone unit (60). The mouthpiece section (61) communicates with a secondary air and powder mixing chamber

(62). Referring to Figs. 10A and 10B, the mixing chamber (62) comprises a cyclone having four equi-angularly spaced tangential air inlets (63) arranged in an annulus around the mixing chamber. The uppermost tangential inlet passage (63) communicates with the primary mixing chamber (45) whilst the remaining three tangential inlets allow air to be drawn therethrough into the cyclone on inhalation through the mouthpiece (61). The section of the secondary mixing chamber (62) within the annulus of air inlets (63) communicates with a progressively narrowing joining portion (64) which communicates with the mouthpiece (61). The end of the mouthpiece unit (60) remote from the mouthpiece (61) is provided with a plug-like outer periphery for engaging within the recess (41) formed in the depending leg section of the hopper unit (16).

The mouthpiece cover (13) is hingedly mounted to the bottom wall of the lower case part (14) and has a resilient latching projection (38) for latching with a catch projection (39) on the lower casing (14) to hold the cover in its closed position. Opposite sides of the mouthpiece at its hinged parts, are formed with respective cam formations (70 and 71). At one side of the cover, a circular cam (70) is formed in association with the cover hinge (72) for cooperation with the lower end of one of the downwardly extending limbs (36) of the yoke member (31). The cam (70) has a small depression (73) at its crest portion in which the lower end of the corresponding yoke limb (36) engages when the cover is in its closed position. As the cover opens, the cam moves to a position to allow the yoke to drop in order to cause actuation of the drug dispensing mechanism as described below.

At the opposite side of the cover, the cam (71) cooperates with a resilient pivotally mounted trigger mechanism (74) which cooperates with the other limb (36) of the yoke member (31). The trigger (74), which is pivotally mounted on the lower casing part (14) comprises three radially extending portions, a first relatively thick portion (75) against which the end of the corresponding yoke limb (36)

locates, a second narrower portion (77) for engaging with the cam (71) and a third narrower and more flexible portion (78) which resiliently abuts against the side wall of the lower case part (14) for resetting the trigger. In the closed position of the cover, the yoke is maintained in its upper position by engagement with the first trigger projection (75), the trigger being maintained in this position by engagement of the second trigger portion (77) with an abutment surface (78) on the cam (71). As the cover is opened, the cam (71) is rotated anti-clockwise until a second abutment surface (79) thereof engages the trigger portion (77) sufficiently to release the trigger portion (75), with a snap action, from its engagement supporting the yoke limb (36) which is thereby allowed to drop under the action of biasing spring (37) acting on the yoke. The third trigger portion (78) is then resiliently deformed against the side wall of the lower case so that when the cover is closed again and the yoke is lifted to its upper position by rotation of the cam (70), the trigger is resiliently reset to its original position in engagement with the lower end of the corresponding yoke limb (36).

In order to control the action of the slide (46), one of the yoke limbs (36) is formed with a laterally projecting, resiliently mounted cam portion (80) having a three dimensional, generally triangular cam track (81) provided thereon (Figure 12). The peg (50) formed on the side of the slide member (46) engages in the cam track (81). The slide (46) is held in its initial position against the action of biasing spring (51), when the yoke member is in its upper position with the mouthpiece cover (13) in its closed position (Figs. 3A and 3B). The peg (50) is then located at the lower end of the vertical portion of the cam track (81) and remains in such position during an initial opening of the cover (13) (Figs. 4A and 4B). When the mouthpiece cover (13) is opened sufficiently to allow the yoke to move downwardly under the action of spring (36), the cam moves downwardly with respect to the peg (50) until peg (50) moves to the upper end of the vertical portion (81A) of the cam track (81) (Figs. 5A and 5B).

allowing, on further opening of the cover (13), the spring (51) to move the slide (46) laterally to its second position during which the peg (50) moves along the horizontal top portion (81B) of the can track (81) (Figs. 6A and 6B). After a drug dispensing operation and when the cover (13) is again moved towards its closed position so that the yoke is lifted, the can then moves upwardly in relation to the peg (50) so that the peg (50) then moves along the slanted portion (81C) of the can track (81) to bring the slide (46) back towards its initial position against the action of its biasing spring (51) (Figs. 7A and 7B).

The lower part of the slanted portion of the can track (81) is formed with a ramp surface which terminates in an end wall (81D) which provides a side wall portion of the vertical can track portion (81A). As the cover is further closed (Figs. 8A and 8B), the peg (50) of the slide member (46) rides over the ramp surface, which is permitted by a resilient deformation of the can portion (80) with respect to the yoke arm (36). When the peg (50) is positioned again in the vertical can track portion (81A), the can portion (80) resiliently snaps back so that the end wall (81D) of the ramp then abuts the peg (50) preventing it from re-entering the slanted can track portion.

The operation of the device is generally as follows. When the cover (13) is open sufficiently to release the trigger (74), the yoke (31) is moved downwardly under the action of its biasing spring (36). This causes the bellows (27) to be compressed which results in air being forced through the supply of powdered drug (90) located in the reservoir (20). The air flow fluidizes the powdered drug and entrains the drug so as to fill the metering depression (47) in the slide (46). As described above, this filling operation is effected by providing an air bleed between the slide (46) and the engaging portions of the hopper unit (16) to maintain an air flow through the dose receiving depression (47) thereby effectively filling that depression with powdered drug.

After a predetermined time interval during which filling of the depression (47) with a dose of powdered drug has been completed and the yoke (31) has moved down sufficiently for the slide peg (50) to have reached the upper horizontal portion (81B) of the can track (81), the slide is moved to its second position under the action of spring (51) whereby the dose laden depression (47) is brought into the primary mixing chamber (45). The design is such that access to the mouthpiece (61) is prevented until the slide has been moved so as to bring a dose of powdered drug into the primary mixing chamber. On inhalation at the mouthpiece (61), air is drawn through the primary mixing chamber (45) causing turbulence around the drug laden depression (47) in the slide (46) which draws the dose of drug into the air stream in the primary mixing chamber (45). Continued inhalation draws the air and powdered drug mixture through the upper tangential air inlet (63) into the second cyclone mixing chamber (62) as well as drawing further swirling air flows through the other three tangential air inlets (63) of the cyclone. The thoroughly mixed air and powdered drug is then inhaled by the patient.

After use, the mouthpiece cover (13) is closed thereby lifting the yoke (35) and causing the slide (46) to be moved back to its initial position as the peg (50) thereof is moved along the slanted portion (81C) of the can track of can (81) as described above. The device is then ready for another drug dispensing operation.

Suitable drugs or drug blends which may be used in an inhaler described above may include salbutamol, beclomethasone dipropionate, budesonide and sodium cromoglycate.

In other embodiments, the inhaler of Figs. 1-12 could be modified so that the cyclone of unit (60) lies in a horizontal plane rather than the generally upright plane adopted in the first embodiment. Moreover, a pivotal plate valve may be provided in the exit of the nozzle (61) or in air inlets into the body (11), which communicate with the nozzle (61), to inhibit the passage of air exhaled by a patient, into the inhaler.

In a further embodiment, a modified trigger mechanism, as illustrated in Figs. 13A-13D, may be utilized. Such a mechanism, as described below, is preferably provided on each side of the cover (13) to cooperate with the respective limbs (36) of the yoke member (31). The limbs (36) are then of an equal length and the trigger (74) is omitted. This provides a more evenly balanced and more reliable triggering of the yoke member (31).

Referring to Figs. 13A-13D, each side of the cover (13) has a circular can (100) integral therewith. The can is formed with an arcuate triggering slot (101) therein. A modified trigger is in the form of a rotary disc (102) mounted on the inhaler body (11) in a face to face sliding disposition with the can (100). The disc (102) has a sector shaped recess (103) formed therein. The disc (102) has an integral lateral peg (104) which engages in the triggering slot (101) of the can (100). The lower end of the respective yoke limb (36) rests on the outer circumference of the disc (102) when the cover (13) is closed, as seen in Fig. 13A, and on the outer circumference of the can (100) after a triggering operation, as seen in Fig. 13D.

As the cover (13) is opened, the slot (101) and the peg (104) move relative to one another, as seen in Fig. 13B, until the peg (104) engages one end of the slot (101), as seen in Fig. 13C. Further opening of the cover (13) results in the rotation of the disc (102), as seen in Fig. 13D, whereby the yoke limb (36) engages in the recess (103) in the disc causing triggering of a drug dose delivery for inhalation at the nozzle (61), as described above in relation to the first embodiment.

The disc (102) is spring biased to its rotary position as shown in Fig. 13A. Therefore, during resetting of the device on closing of the cover (13), the yoke limb (36) is lifted by the can (100) until it is above the disc (102). The disc (102) is then moved by its spring bias to its original cocked position as shown in Fig. 13A.

Alternatively the disc (102) is reset to its original position when the lateral peg (104) engages with the opposite end of the triggering slot (101) as the cover (13) approaches its closed position.

Figure 14 illustrates another possible slide carrier assembly (120) which can replace slide carrier assembly (44) of the first embodiment.

The assembly (120) comprises a slide carrier (121) having a channel-shaped recess (122) for receiving a dosing slide (123) formed with a dose-receiving depression (124) in its upper surface. The recess (122) has a trough (125) formed in its base wall to receive a generally V-shaped spring (126). The free ends of the limbs of the spring (126) act against the underside of the slide (123) to urge it against the underside of the base plate (17) of the hopper unit.

## CLAIMS

1. A medicament dispensing device comprising an inhalation nozzle (61), a reservoir (20) for containing a supply of medicament in powder form, metering means (27,37,47) for producing a dose of powder from said reservoir, dispensing means (50,51,80) for presenting such dose for inhalation through said nozzle, a movable cover (13) for said nozzle, and actuating means (31,72,74), responsive to movement of the cover (13), for causing actuation of said dispensing means, characterized in that said actuating means include means (32-36,72,74), responsive to movement of the cover (13), for causing actuation of said metering means (27,37,47), and, in that, said actuating means (31-36,72,74) are adapted to cause actuation of said metering means (27,37,47) and subsequent actuation of said dispensing means (50,51,80), in response to movement of the cover (13).

2. A device according to Claim 1, wherein said metering and dispensing means (27,37,47;50,51,80) are actuated by opening of said cover (13) by a predetermined amount.

3. A device according to Claim 1 wherein said metering and dispensing means (27,37,47;50,51,80) are actuated by opening of said cover (13) by an amount insufficient to permit inhalation through the nozzle (61).

4. A device according to Claim 1 including an outer casing (11) for housing said reservoir (20) and said metering and dispensing means (27,37,47;50,51,80) wherein the cover (13) is movably connected to said outer casing (11).

5. A device according to Claim 4 wherein said movable cover (13) is held captive on said outer casing (11).

6. A device according to Claim 1 wherein said metering means comprises an element (46) which has means (47) for

receiving a dose of powder, and is moveable between a first position in which said dose receiving means (47) communicate with said reservoir (20) and a second position in which said dose receiving means (47) communicate with an air passage (45) associated with said nozzle (61).

7. A device according to Claim 6 wherein said metering means comprise means (27) to create an air flow to fluidise powder in said reservoir and to deliver a metered dose thereof into said dose receiving means (47).

8. A device according to Claim 7 wherein said metering means include means (27) to increase the pressure of air in said reservoir (20) and to allow for the passage of pressurised air to vent to ambient atmosphere after passing through said dose receiving means (47) thereby loading a powder dose in said dose receiving means.

9. A device according to Claim 8 wherein means (27) are provided to increase the pressure of air in said reservoir (20) by compressing the volume of air in the reservoir.

10. A device according to Claim 9 wherein a bellows (27) is provided for compressing the volume of air in the reservoir (20).

11. A device according to Claim 6 wherein said element is a slide plate (46) with a dose receiving cavity (47) therein.

12. A device according to Claim 6 wherein said dispensing means comprise means (50,51,80) to move said element (46) from said first position to said second position.


13. A device according to Claim 12, wherein said dispensing means comprise means (51) to bias said element (46) to said second position, and means (50,81) to temporarily





maintain said element (46) in said first position against said biasing means (51), said biasing means (51) being released by said actuating means (31,72,74) after actuation of said metering means (27,37,47).

14. A device according to Claim 1 wherein said actuating means comprise cam means (72) associated with said cover (13), and control means (31) acting thereon wherein, in one position of the cam means (72), the control means (31) restrain both the metering and dispensing means (27,37,47;50,51,80), and in a second position of the cam means (72), the control means (31) are actuated to release successively said metering means (27,37,47) and then said dispensing means (50,51,80).

15. A device according to Claim 1, wherein said actuating means (31,72,74) are adapted to reset said metering and dispensing means (27,37,47;50,51,80) on closing of said cover (13).

FIG. 1

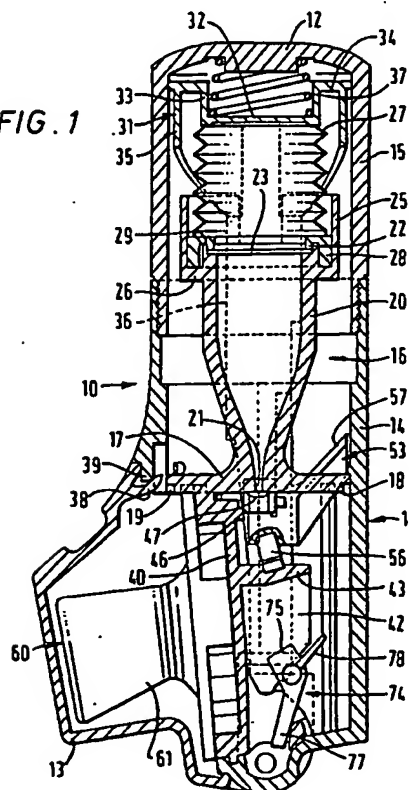

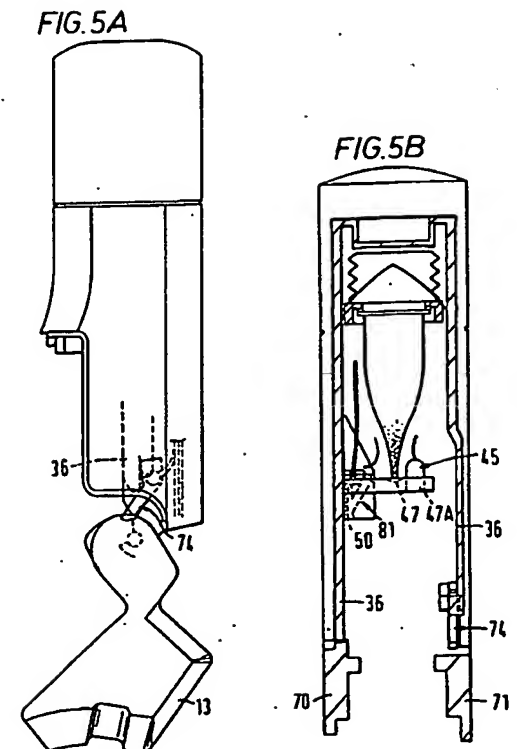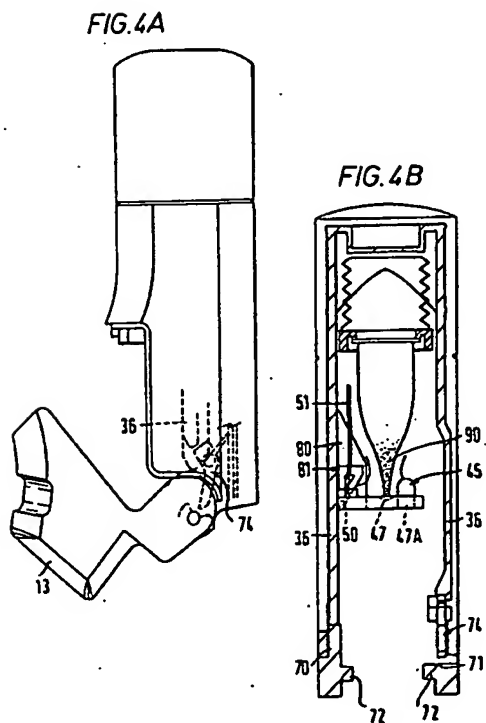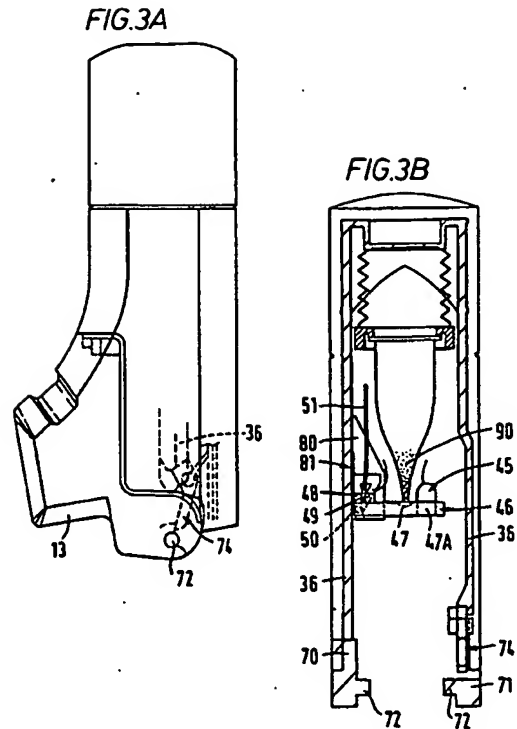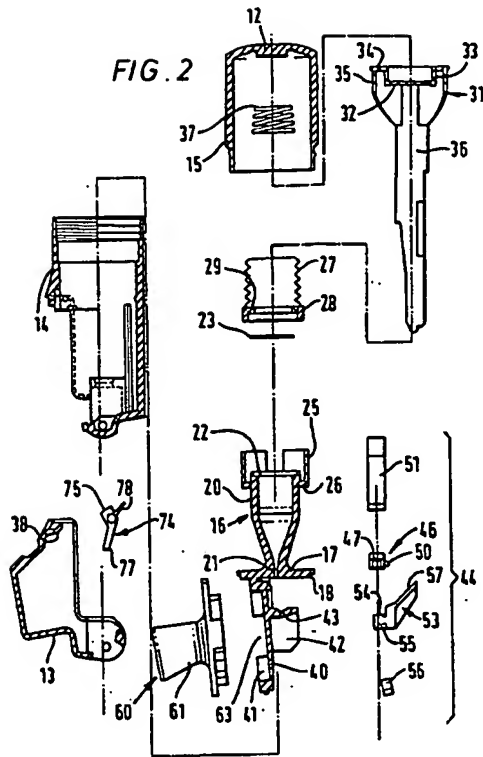



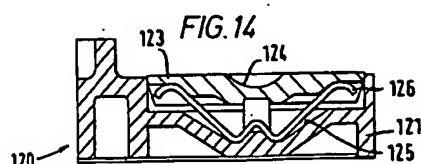


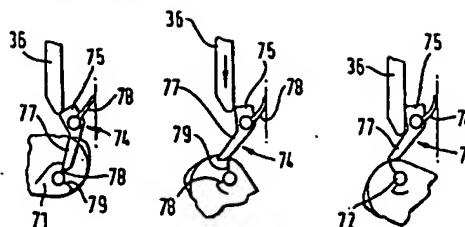


FIG. 11A



**FIG. 11B**

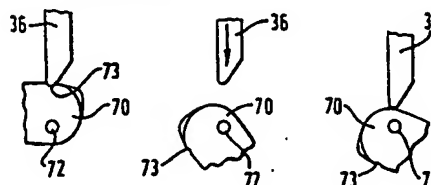


FIG. 12





FIG. 13A



**FIG.13B**




FIG.13C .





FIG.13D



INTERNATIONAL PATENT COOPERATION PCT/GB 93/01893	
A. C. ADMINISTRATIVE INFORMATION IPC 5 A61N15/00	
According to International Patent Classification (IPC) or to both national classification and IPC B. PUBLICATION INFORMATION Information document attached (Classification system followed by classification system) IPC 5 A61N	
Documents attached other than scientific documents or to the extent that such documents are attached in the field concerned Documents that have been submitted during the international search phase of this case and, where practical, search report sent	
C. DOCUMENTS REFERRED TO BY RELATIVITY	
Category	Details of document, with indication, where appropriate, of the relevant paragraph
X, P	WO, A, 93 03782 (DEL BOM) 4 March 1993
Y	see page 19, line 19 - page 20, line 29; figures 10-13
Y	WO, A, 92 10229 (MORTON HEALTHCARE LTD) 25 June 1992 cited in the application see abstract; figures 1,2
Y	US, A, 2 587 215 (PRIESTLY) 26 February 1952 cited in the application see figures
A	FR, A, 2 238 505 (BESPAK INDUSTRIES LTD) 21 February 1975
D. OTHER DOCUMENTS AND REFERENCES	
<input type="checkbox"/>	Patent documents are listed in the continuation of list C.
<input checked="" type="checkbox"/>	Patent heavily examined on filed in prior.
E. SPECIAL CATEGORIES OF RELEVANT DOCUMENTS	
"A"	Document defining the general state of the art which is not deemed to be of particular relevance
"X"	Earlier document but published on or after an international filing date
"Y"	Document which may have been already or possibly already published, but of limited interest to other relevant prior art (specified)
"Z"	Document referring to or used by document, not submitted or other reason
F. DOCUMENTS PUBLISHED AFTER THE INTERNATIONAL FILING DATE BUT BEFORE THE PRIORITY DATE	
"1"	Later document published after the international filing date or priority date and not in conflict with the application but which is considered to be of interest for purposes of examining the application
"2"	Document of particular relevance, the document considered to be of interest to the application in relation to the subject-matter of the application
"3"	Document of particular relevance, the document considered to be of interest to the application in relation to the subject-matter of the application
"4"	Document of particular relevance, the document considered to be of interest to the application in relation to the subject-matter of the application
G. DATE OF PUBLICATION OF THE INTERNATIONAL SEARCH REPORT	
Date of publication of the international search report	Date of ending of the international search report
27 December 1993	07.01.94
Name and mailing address of the Applicant	Inventor's address
Proprietor Patent Office, P.O. Box 100000 10000, 2200 D.V. Avenue Tel: 1-202-394-2000, Fax: 1-202-394-2001 Telex: 1-202-394-2000	Villeneuve, J-M



Patent description used in search report	Publication date	Patent family member(s)	Publication date
WD-A-9303782	04-03-93	AU-A- 2421192	16-03-93
		CA-A- 2093809	16-02-93
		EP-A- 0553326	04-08-93
WD-A-9210229	25-06-92	AU-A- 8932691	08-07-92
		CA-A- 2091166	16-06-92
		CN-A- 1052297	01-07-92
		EP-A- 0561838	29-09-93
US-A-2587215	NONE		
FR-A-2238505	21-02-75	GB-A- 1479283	13-07-77
		AT-A- 343819	26-06-78
		AU-A- 7132974	22-01-76
		BE-A- 817951	18-11-74
		CA-A- 1027005	28-02-78
		CN-A- 573254	15-03-76
		DE-A- 2435186	06-02-75
		JP-A- 50071195	12-06-75
		KL-A- 7409739	27-01-75
		SE-A- 7409405	24-01-75
		US-A- 3921637	25-11-75